


柔润手感,特殊金属光泽,最适合布纹的精品材料 Smooth touch, special golden sheen, the most suitable material for linen finish

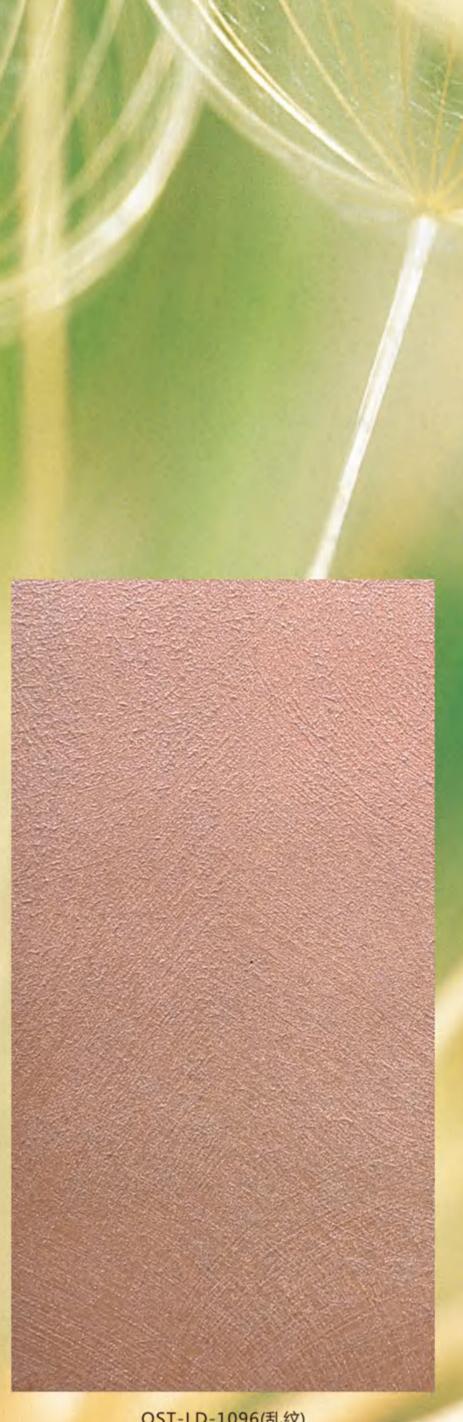

雷登丝绒

产品介绍:

雷登丝绒源自意大利的一类特殊丝绒效果,手感非常柔软,细 微的颗粒质感中闪烁着别样的金属光泽,是最适合布纹,拉丝,乱 纹的精品材料。运用欧施泥经典的圆刷,草皮刷,排刷等工具,普 通工人,不需要培训,就可以简单施工,制作出绚丽复杂的高档壁 纸精品。也可以简单批刮,产生各类意大利天鹅绒的斑驳璀璨效果。

施工工艺:

- 1. 基层处理,符合国家室内油工验收标准,腻子批刮二到三遍,打 磨平整,墙面正负公差小于2毫米;
- 2. 滚涂绒砂漆打底;
- 3. 揉擦(或滚涂)造型;
- 4. 各类工具造型。

备注:雷登丝绒,夏季在墙面施工时,可以滚涂抗碱底漆或硅丙罩 面打底,也可以加入适当缓干剂,可以减少在施工过程中,因为过 早干燥,而产生的不必要接痕。

色彩系统:

根据北美最新流行色, 雷登丝绒共有(96)个常用标准色, 色彩从浅及深,按国际标准的色阶逐行排列和编号,输入编号,即 可得到标准色,最小调漆量实际测量仅为≤50克。也可根据消费者 的实际需求,采用高精度电脑调色机,进行色彩的 DIY,从而衍生 出可以复制的,成千上万不同的色彩。调色系统的色浆采用世界上 最顶级的德国品牌原装进口水性色浆,具有无与伦比的色彩还原性 和上色率,同时通过了德国蓝天使最高环保等级标准的检测。

适用范围:


雷登丝绒广泛应用到各类场所,如:别墅,会所,酒店,公寓, 商场,学校,办公楼等;空间应用如:大堂,过道,公共区域,教 室,客厅,卧室,书房,卫生间和厨房等;局部细节可以应用至: 墙面,天花,灯池,龛,背景墙等室内空间。在中国迅猛发展的个 性化和时尚化的室内装饰领域,雷登丝绒将承担改变空间色彩和肌 理的重要角色。


环保指标:


雷登丝绒系列,通过了国家最严格的环保检测标准,所有涂料 中的有害物质,均在抽样检测中为:未检出状态。同时欧施泥公司 系列的产品,也通过了国际上著名的:法国环保A+认证,北美建筑 LEED检测,德国环保蓝天使VOC检测等。


检测项目	标准要求	检测结果	单项结论
挥发物 (VOC)	≤120	未检出	符合
苯和游离苯	≤100	未检出	符合
可溶重金属Pb Cd Cr Hg	≤60	均未检出	符合

本系列色卡中的小色块,因为人眼视觉角度的原因,会比实际上墙施工的色彩略浅, 系列色卡中的任意色彩,均以复制尺寸300*300及以上大样板的色彩为准,以期达到 和墙面尽可能接近的颜色。

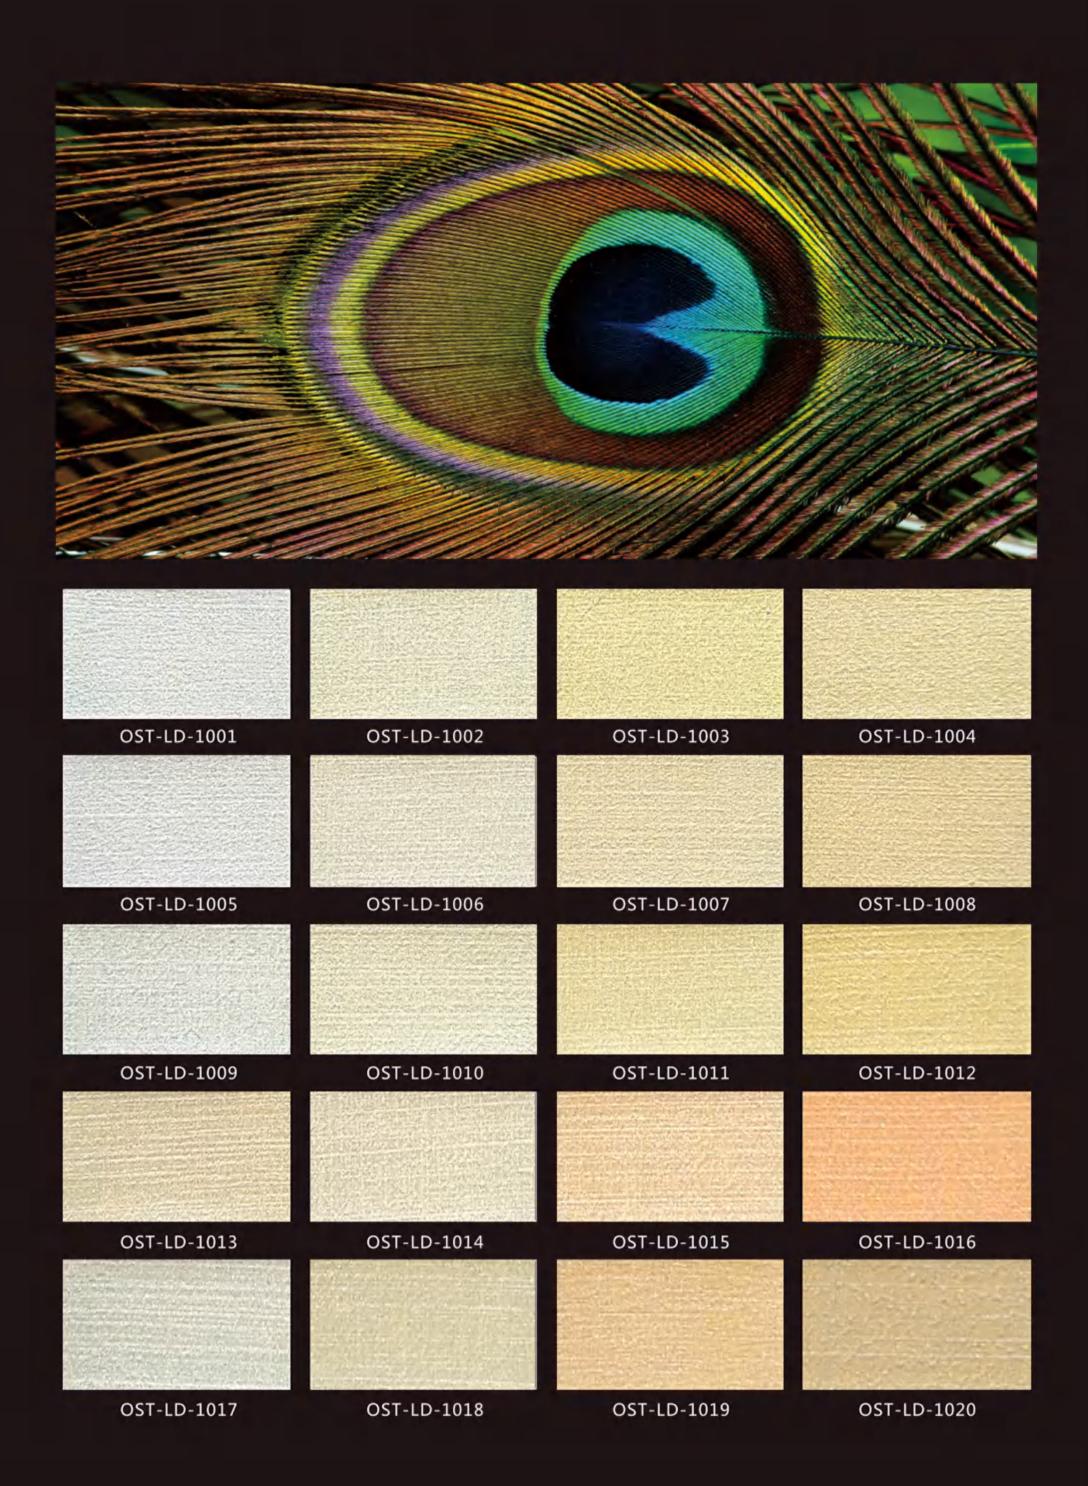

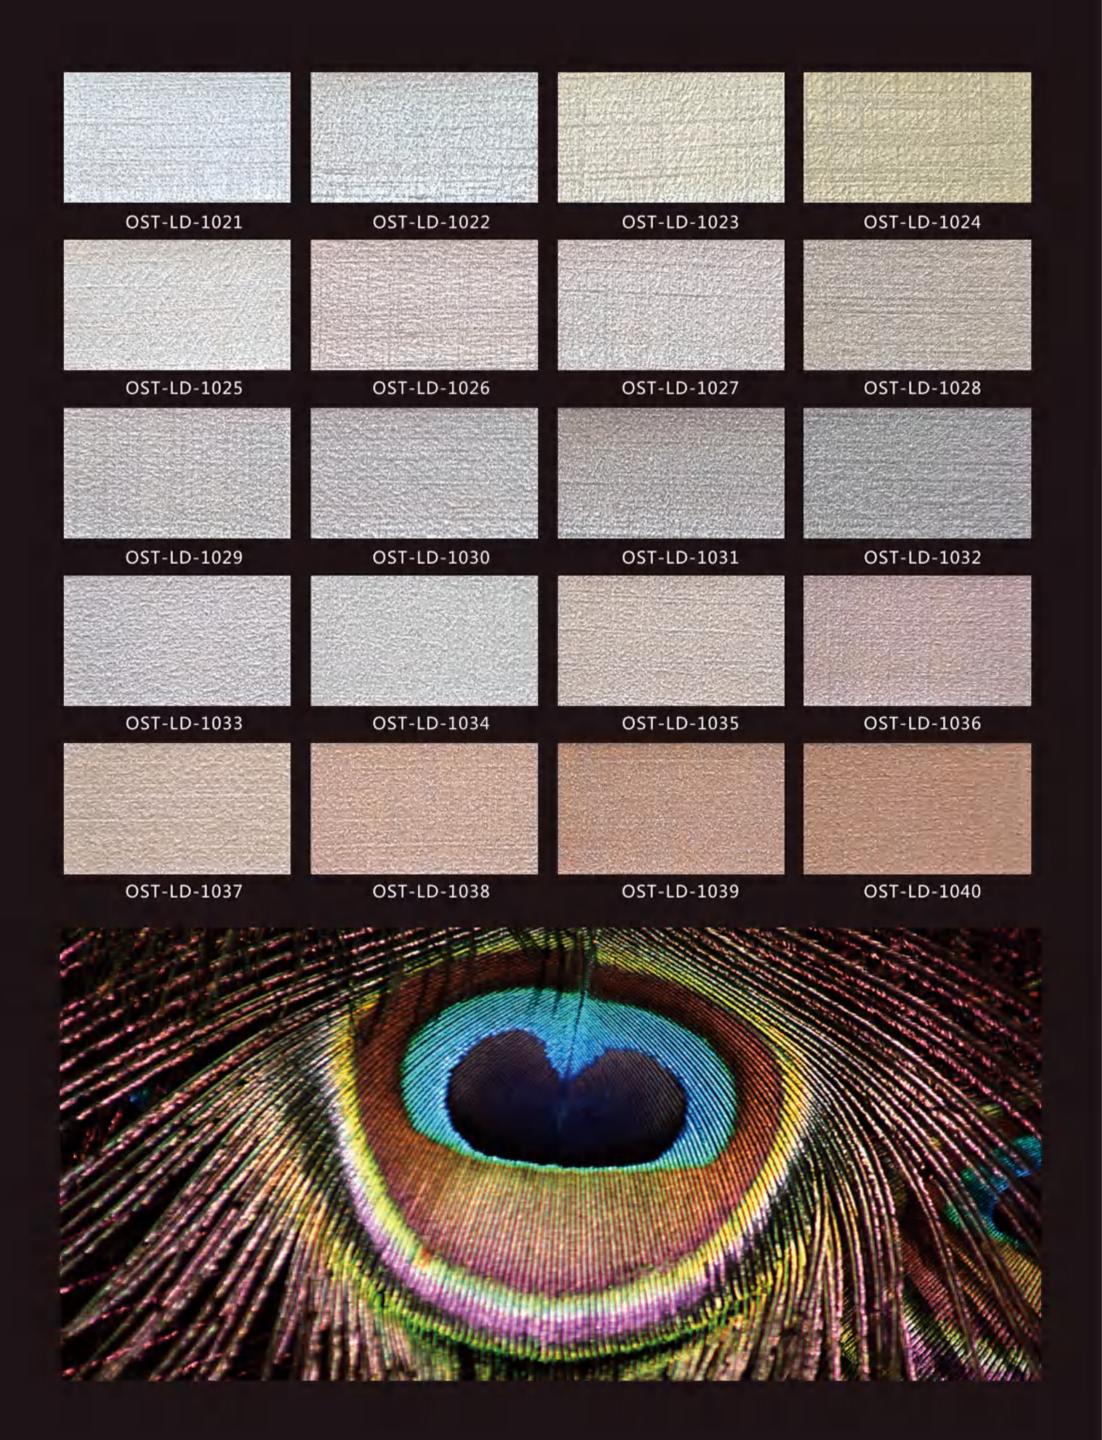

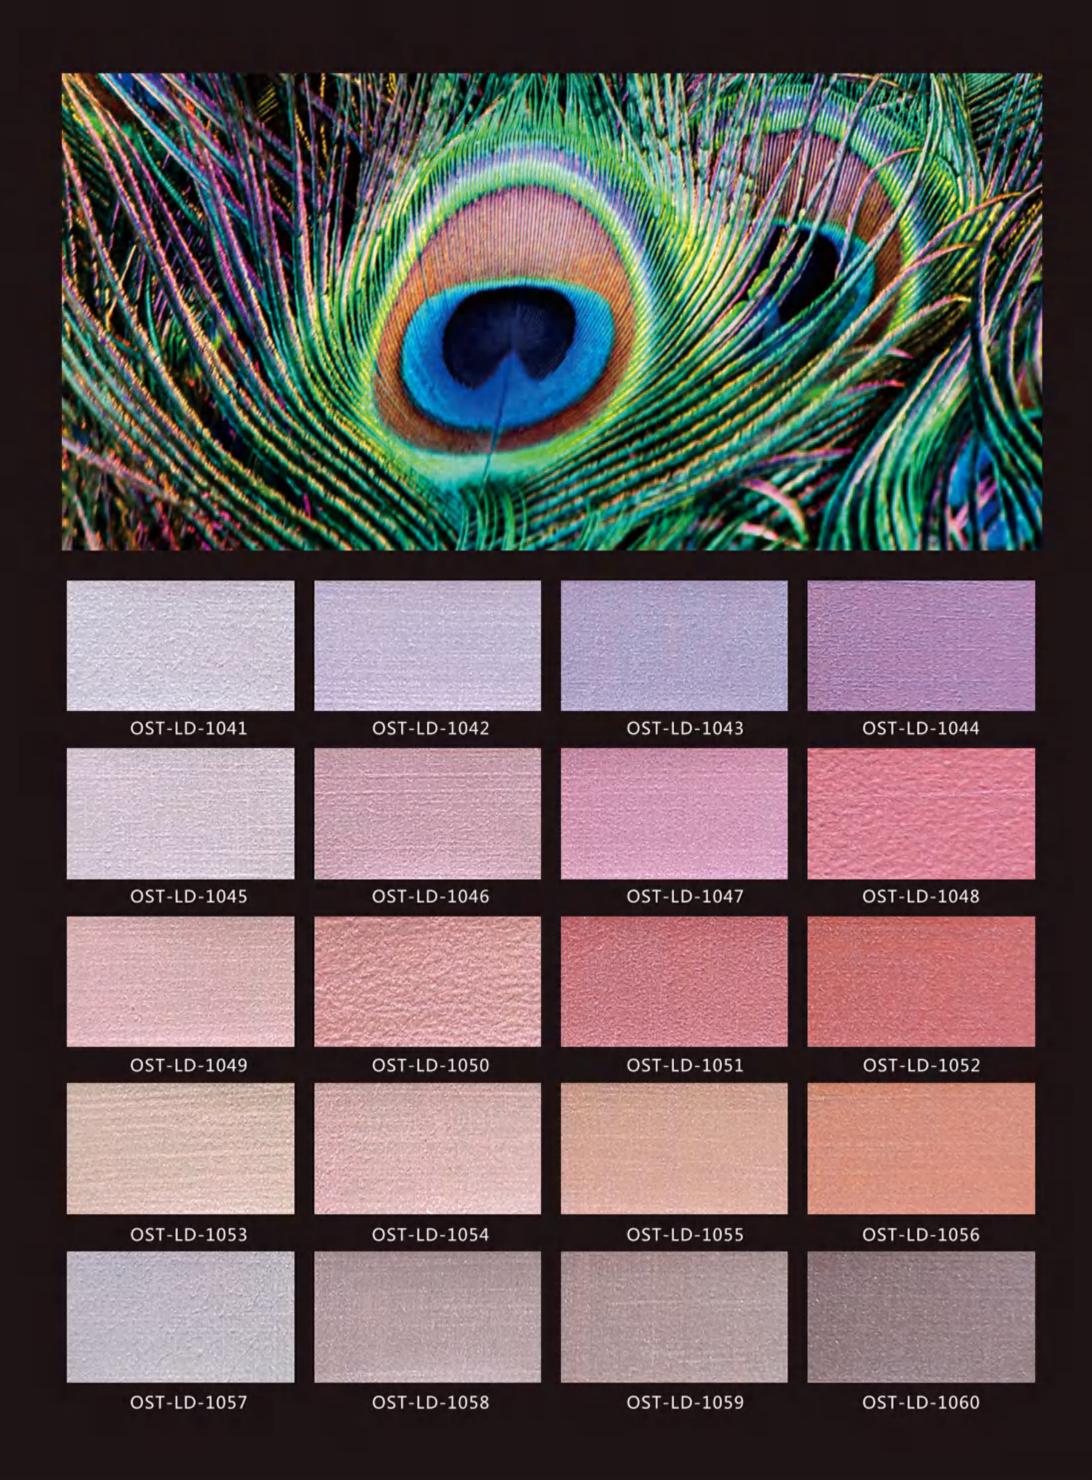

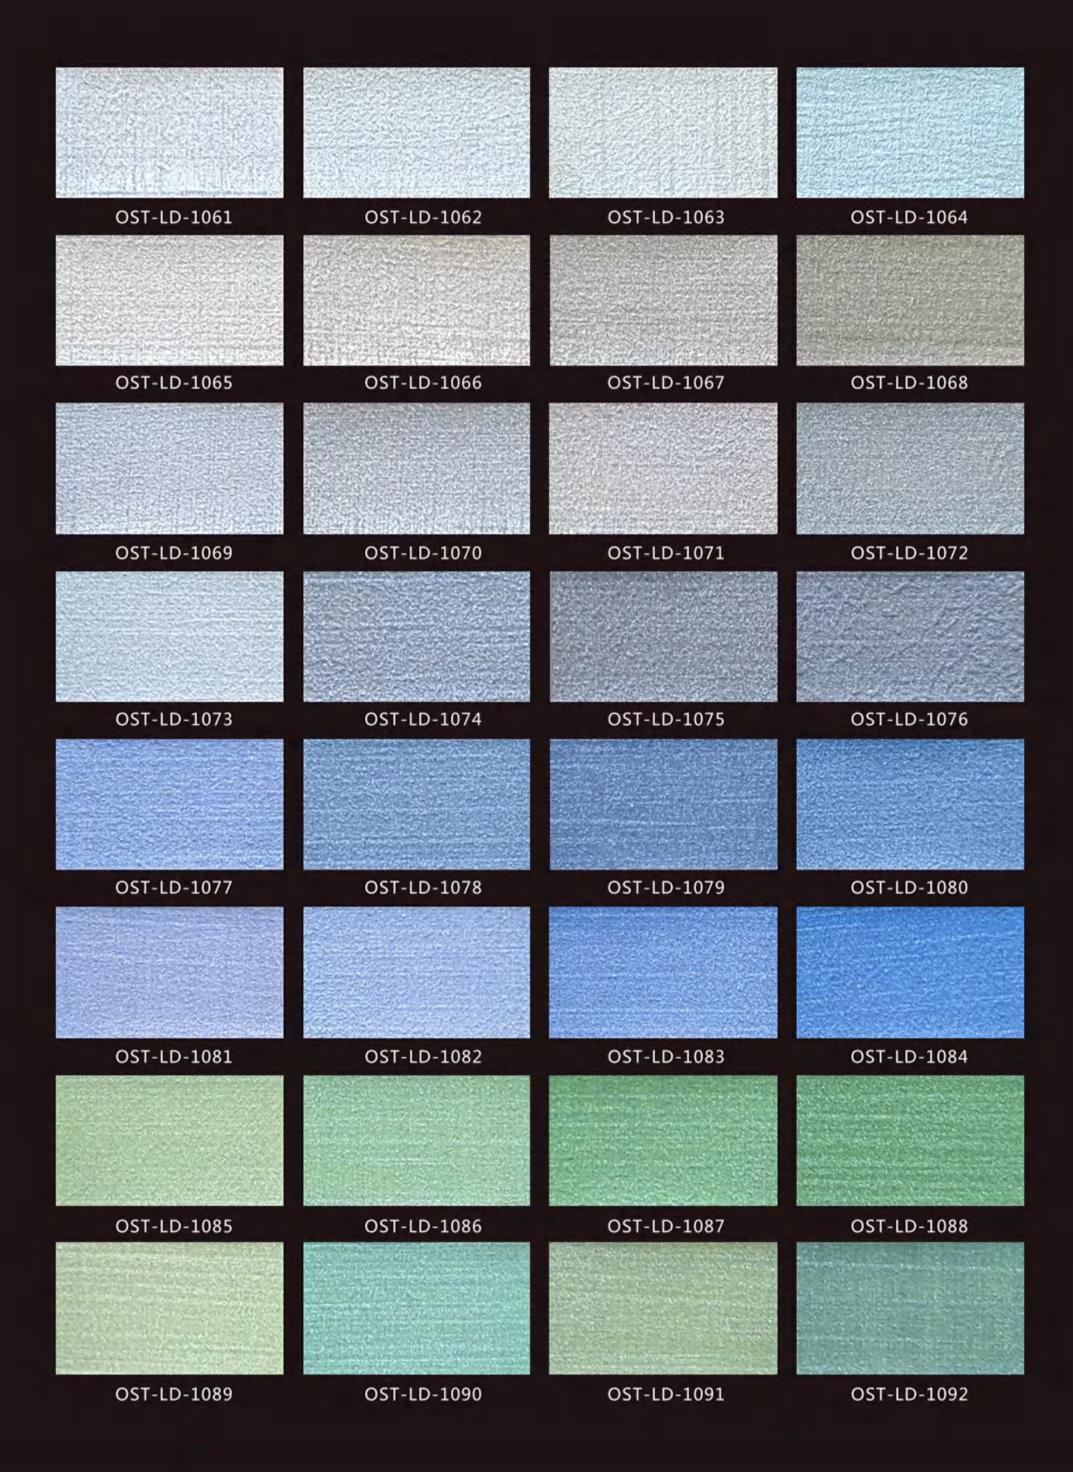



OST-LD-1094(树皮)

OST-LD-1095(堆砂)

LEIDEN VELVET

Product Description:

LEIDEN VELVET has a special velvet effect originated from Italy with very soft touch and granular texture showing unique golden sheen, which is most suitable material for linen, brushed and irregular finish. With the use classic round brush, sward brush, brush and other tools, ordinary works can simply operate without training and create brilliant and various superior wallpapers with different Italian velvet-like colorful and bright effects.

Application Method:

- Base check: The base shall conform to the national indoor paintwork acceptance criteria. Scrape the putty twice or three times, polish and level to make the plus-minus tolerance of the wall surface less than 2mm
- 2. Roll paint leather paint for the base.
- 3. Rub (or roll paint) and shape.
- 4. Use different tools for shaping.

Note: LEIDEN VELVET, when applied on the wall in summer, can be roll painted with alkali-resistant primer or silicone acrylic glazing for the base. Also combine with proper retarders, which can reduce unnecessarily lapping defects caused by drying too fast in application.

Color System:

According to the latest trend color in North America, LEIDEN VELVET launched has 96 common standard colors, which are sorted and numbered from light to dark, row by row according to international standard color levels. Input the number and then get the standard color. The minimum paint adjustment amount is less than 50 grams. Also, based on consumers demand, high-accuracy auto dispensers can be used to apply color DIY as to make thousands of different duplicated colors. Color paste of color dispensing system uses the world top brand water color paste originally imported from Germany, which have excellent color restoration and dyeing rate and has passed the test of German Blue Angel's highest environmental protection degree.

Space Application:

The LEIDEN VELVET by has been widely applied in various places, such as villas, clubs, hotels, apartments, shopping malls, schools and office buildings. Space applications include lobbies, aisles, public areas, classrooms, living rooms, bedrooms, study rooms, bathrooms, kitchens and other rooms. Details can also be used for wall surface, ceilings, lamp pools, niche, background walls and other internal space. In the Chinese rapidly developing personalized and fashionable interior decoration market, LEIDEN VELVET will be take an important part in changing space colors and texture.

Environmental Protection Index:

LEIDEN VELVET by has reached the strictest national environmental protection testing standards. In the testing, no hazardous chemicals were detected in all paint. Meanwhile, series products have passed world-known accreditation, French A+ Certification, LEED Test Report, German Blue Angel VOC Test Report.

Testing Items	Standard Requirement	Result	Single Conclusion
Volatile Organic Compounds (VOC)	≤120	Not detected	Conformity
Benzene and free benzene	≤100	Not detected	Conformity
Pb Cd Cr Hg	≤60	Not detected	Conformity

Small color chip in the series color cards will look lighter than the actual color painted on the wall due to human nature visual angle. All colors in the series Color Cards are subject to the color in the big template with copy size 300*300 or above to achieve the same color as the wall surface.

声明:

该系产品色卡 (Color Card)为:全自动电脑调色机 (Auto Dispenser)调色,所有电脑数据均经过实际操作检测,拥有无与伦比的准确性和可复制性。我方对全部数据拥有知识产权,对未经我方许可,使用该数据库,进行商业活动的公司和个人,我们将追究相应的法律责任。

我方拥有以上全自动电脑调色机,色卡,空间配色系统,产品和工艺的最终解释权。 关于该系列产品色卡和工艺的 DIY 应用,我方将在系统专业色彩的培训中,做更详细讲解。

Statement:

The color card of our full series products is tuned by the auto dispenser. All computer data have been tested by real operations and have excellent accuracy and duplication. The company owns the intellectual property for all data. Unauthorized data usage for business activity by company or individual is prohibited and shall bear all responsibilities. reserves the right of final explanation for the above auto dispensers, color cards, space matching system, products and technology. Further explanation about the DIY application series color cards and technology will be discussed in the company's professional color training.







北美LEED检测 Building LEED Test Report







丹麦国家认证 DANAK accreditation