LEATHER PAINT

Auto Dispenser Standard Color Card

皮革漆

全自动电脑调色机色卡

皮革般的粒面层,自然的粒纹和柔润光泽,耐划伤 Leather-like grain side layer, natural grainy texture and smooth gloss, scratch resistant

皮革漆

产品介绍:

皮革漆又称为: 绒砂漆。简单滚涂,就可以产生皮革一般的粒面质感。在欧洲非常流行,是一种新型的微质感墙面涂料。同时再滚涂各类特殊性能罩光层后,可以当做功能性的质感墙体装饰,具有很好的防水性,耐污性和抗划伤性能。皮革漆区别于传统乳胶漆和质感漆,具有特殊的施工性,大面积用海绵滚涂施工,不会堵塞海绵滚涂的孔洞,且具有特殊的塑形性和均匀纹理。同时,皮革漆还可以当做更高档艺术涂料的底漆使用。

施工工艺:

- 1. 基层处理,符合国家室内油工验收标准,腻子批刮二到三遍,打磨平整,墙面正负公差小于2毫米;
- 2. 用海绵滚涂,滚涂皮革漆一到两遍。

备注:用皮革漆当成品漆销售时,在其表面滚涂或喷涂,硅丙罩光, 黑洞罩光,或萤火虫罩光等,效果更佳。

色彩系统:

常用标准色,色彩从浅及深,按国际标准的色阶逐行排列和编号,输入编号,即可得到标准色,最小调漆量实际测量仅为≤50克。也可根据消费者的实际需求,采用公司高精度电脑调色机,进行色彩的 DIY,从而衍生出可以复制的,成干上万不同的色彩。公司的调色系统的色浆,采用世界上最顶级的德国品牌原装进口水性色浆,具有无与伦比的色彩还原性和上色率,同时通过了德国蓝天使最高环保等级标准的检测。

适用范围:

皮革漆广泛应用到各类场所,如:别墅,会所,酒店,公寓,商场,学校,办公楼等;空间应用如:大堂,过道,公共区域,教室,客厅,卧室,书房,卫生间和厨房等;局部细节可以应用至:墙面,天花,灯池,龛,背景墙等室内空间。在中国迅猛发展的个性化和时尚化的室内装饰领域,皮革漆将承担改变空间色彩和肌理的重要角色。

环保指标:


皮革漆系列,通过了国家最严格的环保检测标准,所有涂料中的有害物质,均在抽样检测中为: 未检出状态。 同时系列的产品,也通过了国际上著名的: 法国环保 A+认证,北美建筑 LEED检测,德国环保蓝天使VOC检测等。

检测项目	标准要求	检测结果	单项结论
挥发物 (VOC)	≤120	未检出	符合
苯和游离苯	≤100	未检出	符合
可溶重金属Pb Cd Cr Hg	≤60	均未检出	符合

本系列色卡中的小色块,因为人眼视觉角度的原因,会比实际上墙施工的色彩略浅,系列色卡中的任意色彩,均以复制尺寸300*300及以上大样板的色彩为准,以期达到和墙面尽可能接近的颜色。





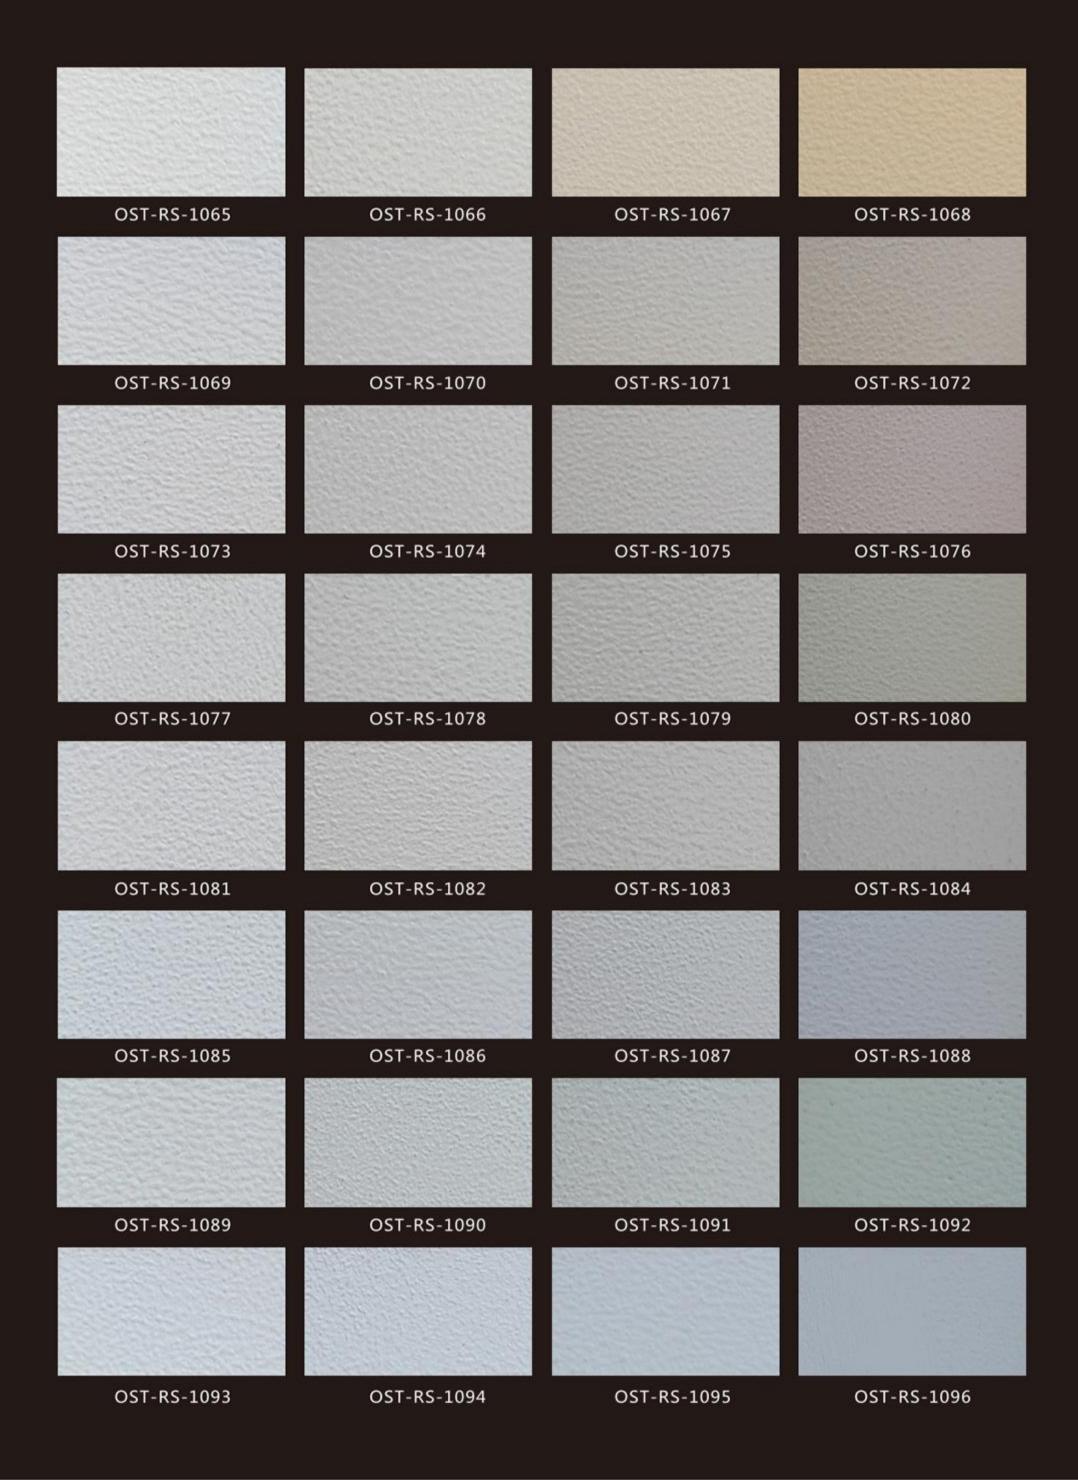





Product Description:

LEATHER PAINT (also named SAND VELVET) can make a leather-like grain side texture by simple roll painting. It is a new type of fine grain texture wall surface paint, which is very popular in Europe nowadays. Meanwhile, after roll painting various types of varnish with special performance, it can serve as a functional texture wall surface decoration and it has superior water proof, stain resistance and scratch resistance. Differing from traditional emulsion paint and texture paint, LEATHER PAINT has a special application performance. Apply it on a large area by sponge roll painting won't block the holes. It also has special flexibility and even texture. Meanwhile, LEATHER PAINT can be used as superior art paint primer.

Application Method:

- Base check: The base shall conform to the national indoor paintwork acceptance criteria. Scrape the putty twice or three times, polish and level to make the plus-minus tolerance of the wall surface less than 2mm
- 2. Use sponge to roll paint and paint LEATHER PAINT once or twice. **Note:** When LEATHER PAINT is sold as finished paint, it will work better by roll painting or spraying silicone acrylic varnish, black hole varnish, firefly varnish etc.

Color System:

According to the latest trend color in North America, LEATHER PAINT launched by has 128 common standard colors, which are sorted and numbered from light to dark, row by row according to international standard color levels. Input the number and then get the standard color. The minimum paint adjustment amount is less than 50 grams. Also, based on consumers demand, high-accuracy auto dispensers can be used to apply color DIY as to make thousands of different duplicated colors. Color paste of color dispensing system uses the world top brand water color paste originally imported from Germany, which have excellent color restoration and dyeing rate and has passed the test of German Blue Angel's highest environmental protection degree.

Space Application:

The LEATHER PAINT has been widely applied in various places, such as villas, clubs, hotels, apartments, shopping malls, schools and office buildings. Space applications include lobbies, aisles, public areas, classrooms, living rooms, bedrooms, study rooms, bathrooms, kitchens and other rooms. Details can also be used for wall surface, ceilings, lamp pools, niche, background walls and other internal space. In the Chinese rapidly developing personalized and fashionable interior decoration market, LEATHER PAINT will be take an important part in changing space colors and texture.

Environmental Protection Index:

LEATHER PAINT by OURSTUCCO has reached the strictest national environmental protection testing standards. In the testing, no hazardous chemicals were detected in all paint. Meanwhile, OURSTUCCO series products have passed world-known accreditation, French A+ Certification, LEED Test Report, German Blue Angel VOC Test Report.

Testing Items	Standard Requirement	Result	Single Conclusion
Volatile Organic Compounds (VOC)	≤120	Not detected	Conformity
Benzene and free benzene	≤100	Not detected	Conformity
Pb Cd Cr Hg	≤60	Not detected	Conformity

Small color chip in the series color cards will look lighter than the actual color painted on the wall due to human nature visual angle. All colors in the series Color Cards are subject to the color in the big template with copy size 300*300 or above to achieve the same color as the wall surface.

声明:

该系产品色卡(Color Card)为:全自动电脑调色机(Auto Dispenser)调色,所有电脑数据均经过实际操作检测,拥有无与伦比的准确性和可复制性。我方对全部数据拥有知识产权,对未经我方许可,使用该数据库,进行商业活动的公司和个人,我们将追究相应的法律责任。

我方拥有以上全自动电脑调色机,色卡,空间配色系统,产品和工艺的最终解释权。 关于该系列产品色卡和工艺的 DIY 应用,我方将在系统专业色彩的培训中,做更详细讲解。

Statement:

The color card of our full series products is tuned by the auto dispenser. All computer data have been tested by real operations and have excellent accuracy and duplication. The company owns the intellectual property for all data. Unauthorized data usage for business activity by company or individual is prohibited and shall bear all responsibilities. reserves the right of final explanation for the above auto dispensers, color cards, space matching system, products and technology. Further explanation about the DIY application series color cards and technology will be discussed in the company's professional color training.







北美LEED检测 Building LEED Test Report



